



ELSA DIGI-FLEX DISPLAY PANEL


**3L-DF/TP/12**

12.1 INCH TOUCH PANEL

### GENERAL FEATURES:

- Pin-Point Leak Location Precisely, tolerance +/-1m. (indication by **RED DOT**).
- History/Event Log : 5,000 events based on FIFO basis.
- “Freezing” of selected zone(s) during maintenance/repair and no fault message generated.
- Readily connect to Mobile network / dialer for SMS fault notification (Optional)
- Modbus/TCP (Optional).
- Ability to Zoom-In onto each floor plan map
- Max. 50 Zones monitoring and display function
- Monitor up to 10 units of 3L-DF/SDP
- Systems able to monitor up to an accumulated Sensing Cable length of 5,000m (500m x 10 units) for LLDS OR up to 1,500m (150m x 10 units) for HLLDS application.
- True Digital Leak sensitivity setting (threshold level 1 to 9) - applicable to LLDS only.  
eg: Level 1 ~ 3cm ; Level 9 ~ 50cm of liquid detected
- Modbus information is capable to show leak sensitivity level, thus the user will know the amount of water presence at the point of detection
- Redundancy : Fail-Safe Loop Back or Token Ring connection capability.  
(continues to detect leaks even cable break at 1st meter of sensing cable).

**DIMENSION:**

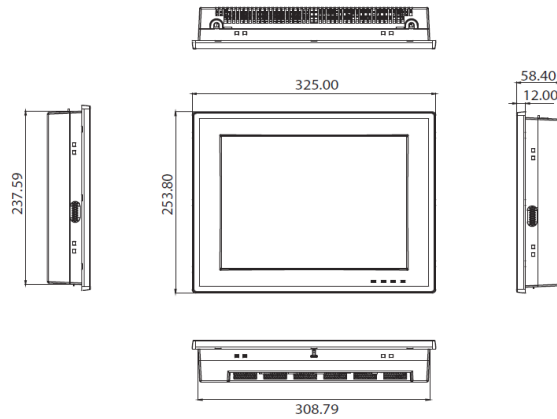

**Dimension: 325mm(L)\*253.8mm(H)\*58.4mm(D)**

**TYPICAL DIGI- FLEX SERIES SCHEMATIC DIAGRAM:**

